

## DESCRIPTION

The MX3401 uses advanced trench technology to provide excellent  $R_{DS(ON)}$ , low gate charge and operation with gate voltages as low as -2.5V. This device is suitable for use as a load switch or in PWM applications.


## GENERAL FEATURES

- $V_{DS}=-30V$ ,  $I_D=-4.4A$
- $R_{DS(ON)}(\text{Typ.})=68\text{m}\Omega$  @  $V_{GS}=-2.5V$
- $R_{DS(ON)}(\text{Typ.})=47\text{m}\Omega$  @  $V_{GS}=-4.5V$
- $R_{DS(ON)}(\text{Typ.})=40\text{m}\Omega$  @  $V_{GS}=-10V$
- High Power and current handing capability
- Lead free product is acquired
- Surface Mount Package

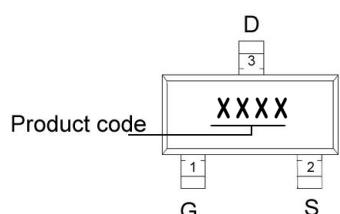
## APPLICATION

- PWM applications
- Load switch
- Power management

## PINOUT



Schematic diagram



Marking and pin Assignment



SOT-23-3L top view

## ORDERING INFORMATION

Part Number	Storage Temperature	Package	Devices Per Reel
MX3401	-55°C to 150°C	SOT-23-3L	3000

## ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	-30	V
Gate-Source Voltage	$V_{GS}$	$\pm 12$	V
Drain Current-Continuous	$I_D$	-4.4	A
Pulsed Drain Current <sup>(Note1)</sup>	$I_{DM}$	-30	A
Maximum Power Dissipation	$P_D$	1.2	W
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	°C

## THERMAL RESISTANCE

Thermal Resistance, Junction-to-Ambient <sup>(Note2)</sup>	$R_{\theta JA}$	104	°C/W
--	-----------------	-----	------

Note 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

Note 2. Surface Mounted on FR4 Board,  $t \leq 10$  sec.


**ELECTRICAL CHARACTERISTICS**( $T_A=25^\circ C$  unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=-250\mu A$	-30	-	-	V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=-24V, V_{GS}=0V$	-	-	-1	$\mu A$
Gate-Body Leakage Current	$I_{GSS}$	$V_{GS}=\pm 10V, V_{DS}=0V$	-	-	$\pm 100$	nA
<b>On Characteristics</b> <sup>(Note 3)</sup>						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-0.7	-1	-1.3	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS}=-2.5V, I_D=-1A$	-	68	85	$m\Omega$
		$V_{GS}=-4.5V, I_D=-4A$	-	47	58	$m\Omega$
		$V_{GS}=-10V, I_D=-4.2A$	-	40	50	$m\Omega$
Forward Transconductance	$g_{FS}$	$V_{DS}=-5V, I_D=-4.2A$	-	10	-	S

**Dynamic Characteristics**<sup>(Note 4)</sup>

Input Capacitance	$C_{iss}$	$V_{DS}=-15V, V_{GS}=0V, F=1.0MHz$	-	950	-	pF
Output Capacitance	$C_{oss}$		-	115	-	pF
Reverse Transfer Capacitance	$C_{rss}$		-	75	-	pF

**Switching Characteristics**<sup>(Note 4)</sup>

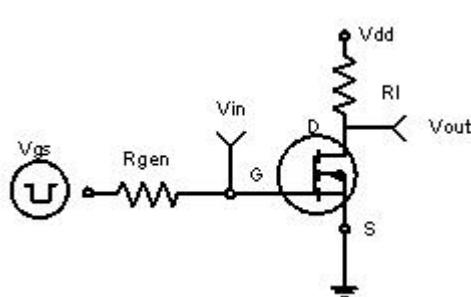
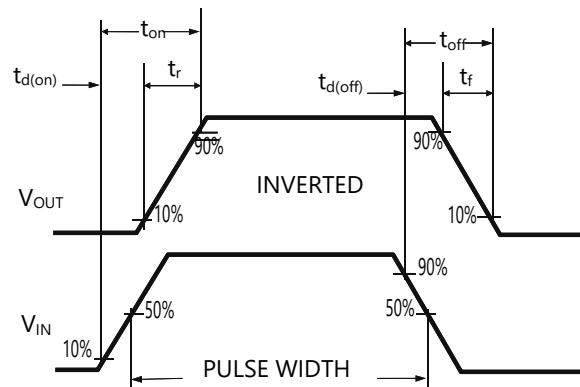
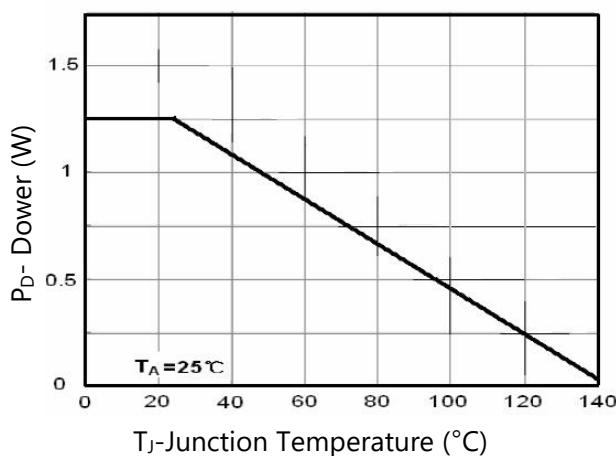
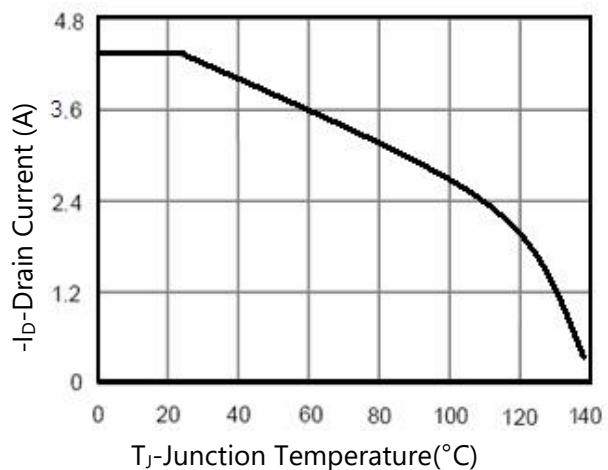
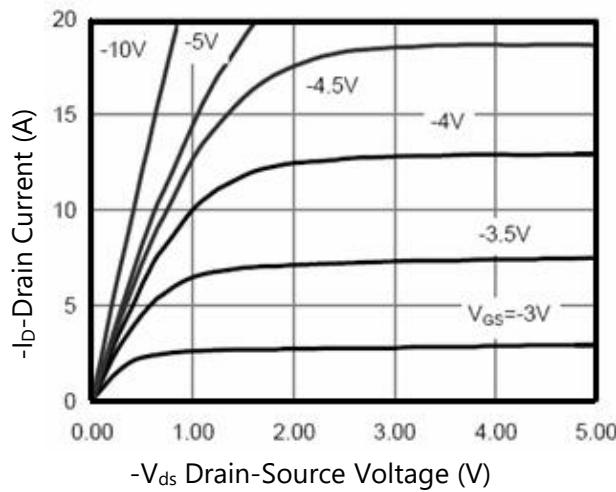
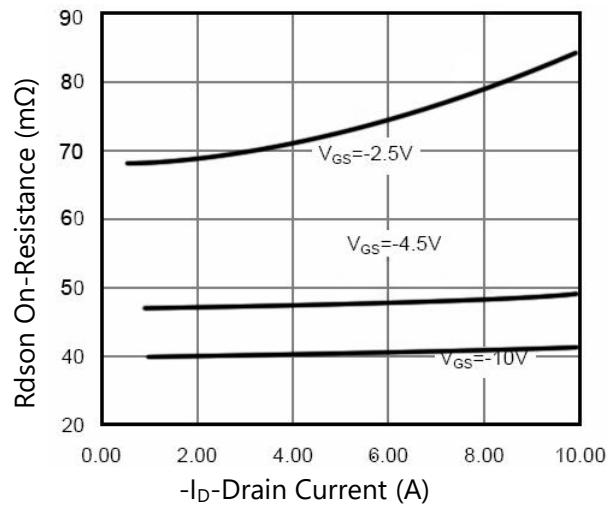
Turn-on Delay Time	$t_{d(on)}$	$V_{DD}=-15V, I_D=-3.2A, V_{GS}=-10V, R_{GEN}=6\Omega$	-	7	-	nS
Turn-on Rise Time	$t_r$		-	3	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	30	-	nS
Turn-Off Fall Time	$t_f$		-	12	-	nS
Total Gate Charge	$Q_g$	$V_{DS}=-15V, I_D=-4A, V_{GS}=-4.5V$	-	9.5	-	nC
Gate-Source Charge	$Q_{gs}$		-	2	-	nC
Gate-Drain Charge	$Q_{gd}$		-	3	-	nC

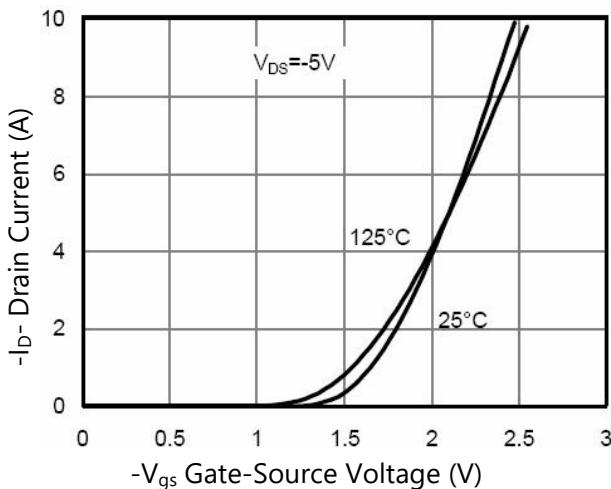
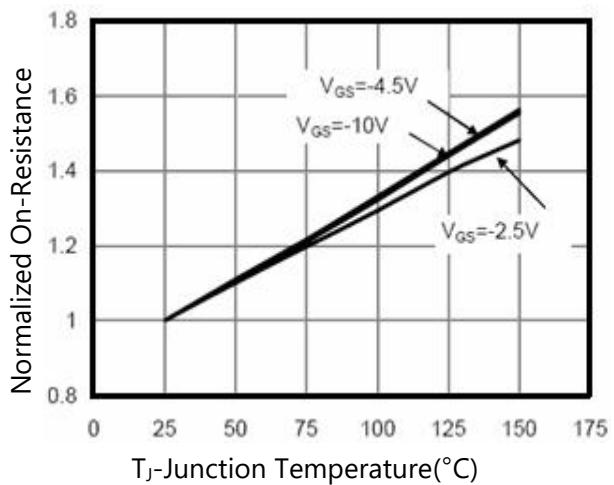
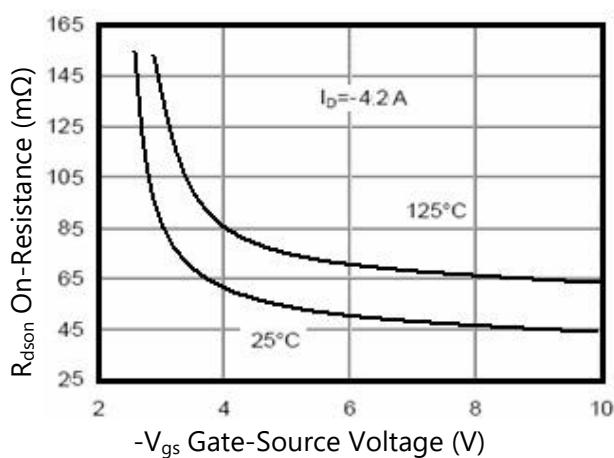
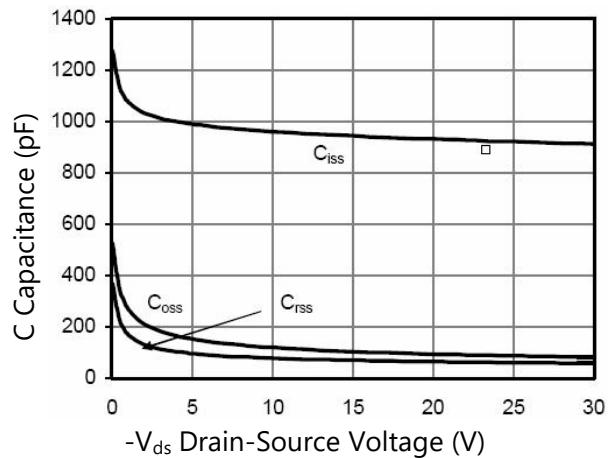
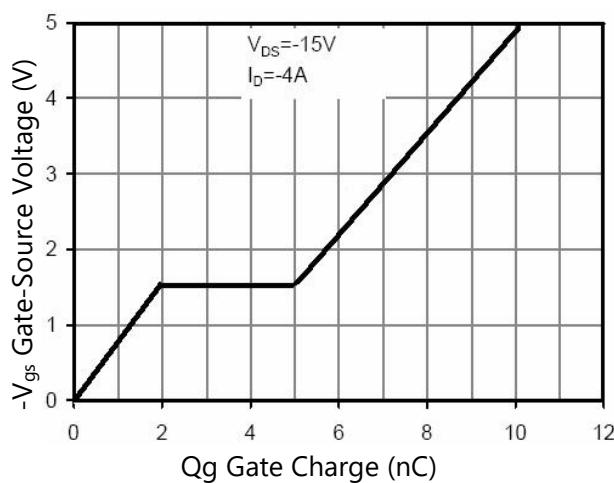
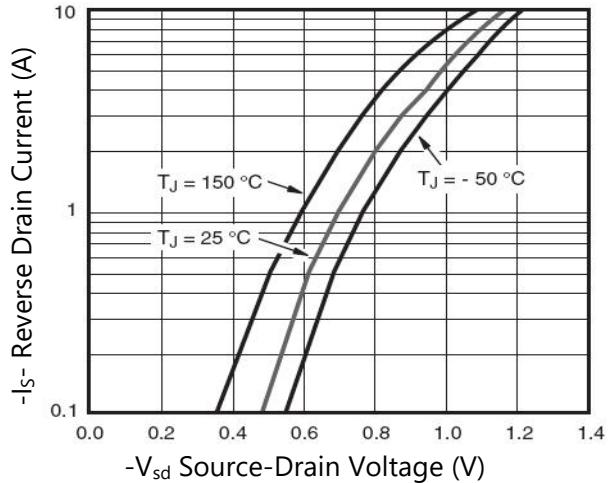
**Drain-Source Diode Characteristics**

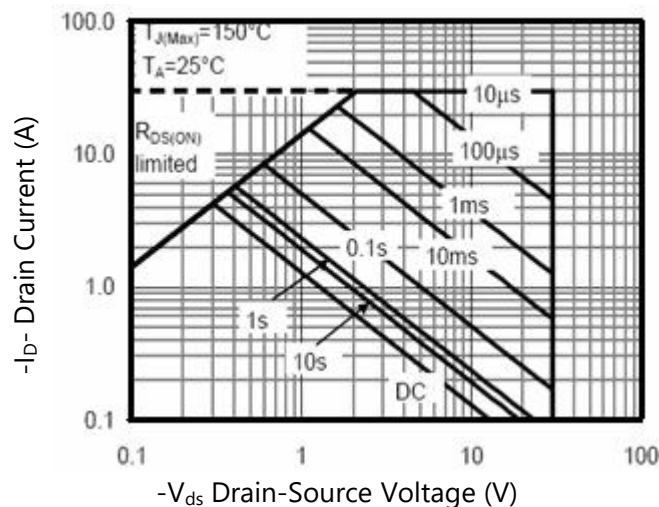
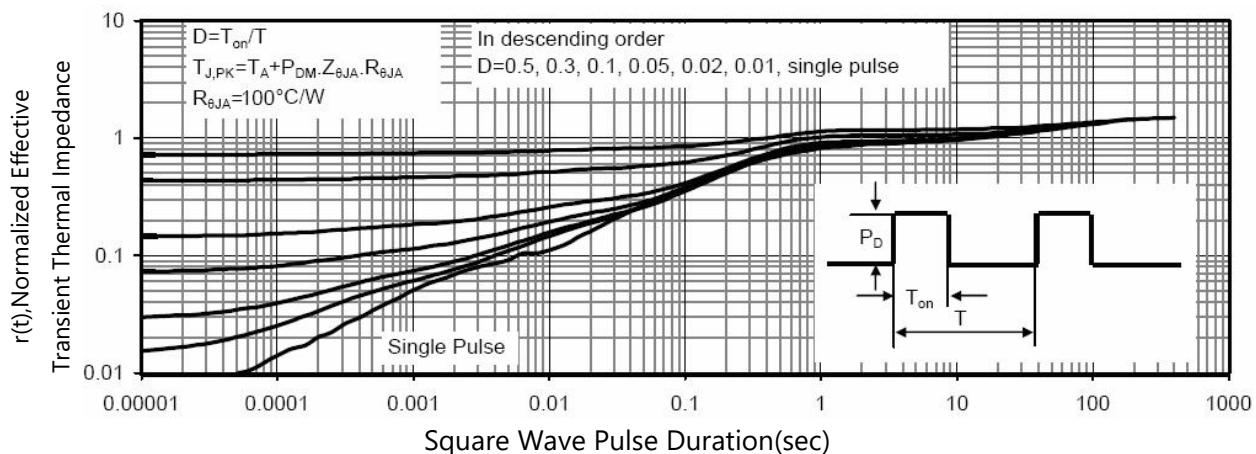
Diode Forward Voltage <sup>(Note 3)</sup>	$V_{SD}$	$V_{GS}=0V, I_S=-1A$	-	-	-1.2	V
---	----------	----------------------	---	---	------	---

Note 3. Pulse Test: Pulse Width  $\leq 300\mu s$ , Duty Cycle  $\leq 2\%$ .

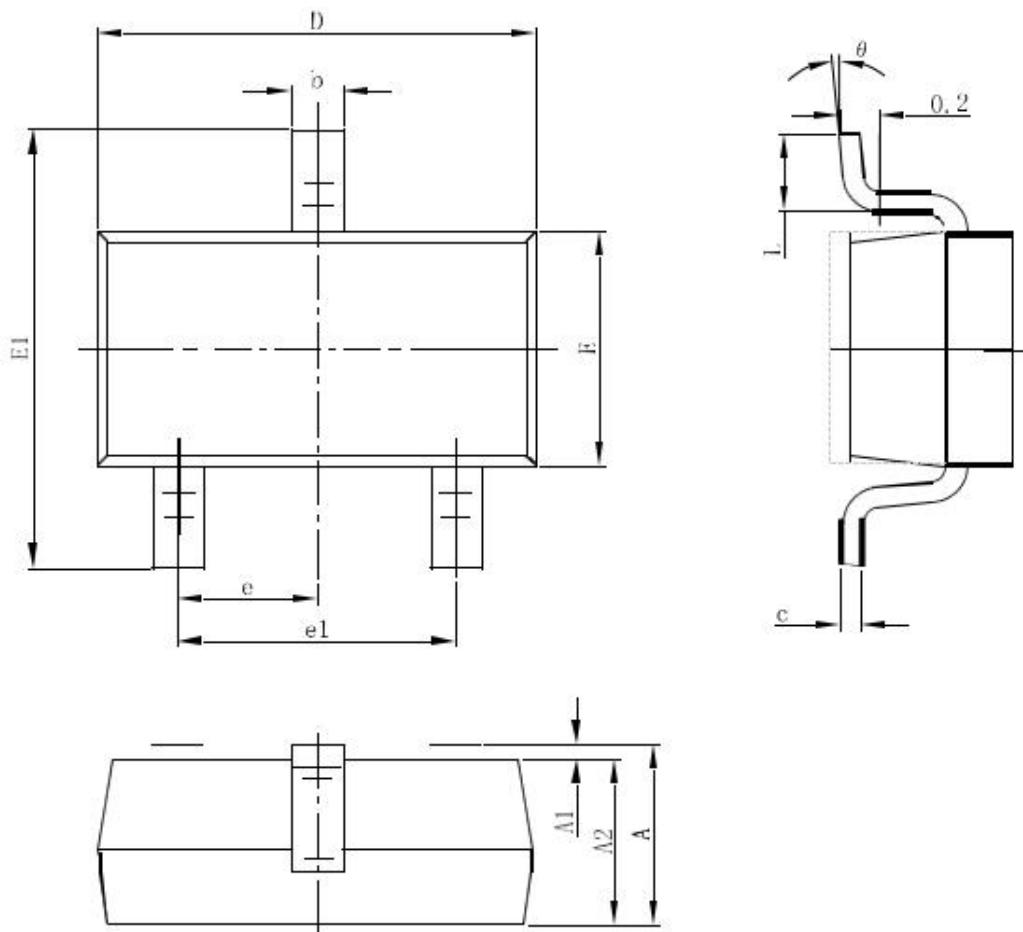
Note 4. Guaranteed by design, not subject to product.


**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**
**Figure 1. Switching Test Circuit**

**Figure 2. Switching Waveform**

**Figure 3. Power Dissipation**

**Figure 4. Drain Current**

**Figure 5. Output Characteristics**

**Figure 6. Drain-Source On-Resistance**



**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**
**Figure 7. Transfer Characteristics**

**Figure 8. Drain-Source On-Resistance**

**Figure 9. Rdson vs Vgs**

**Figure 10. Capacitance vs VDS**

**Figure 11. Gate Charge**

**Figure 12. Source- Drain Diode Forward**



**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**
**Figure 13. Safe Operation Area**

**Figure 14. Normalized Maximum Transient Thermal Impedance**


## PACKAGE INFORMATION

**SOT-23-3L**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°